

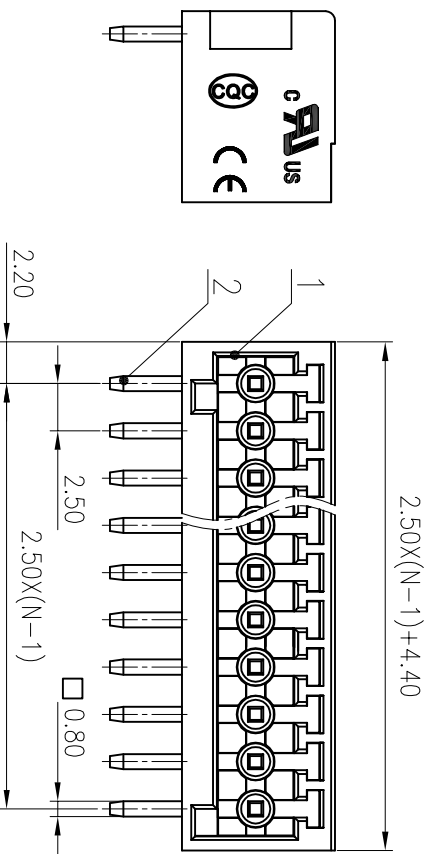
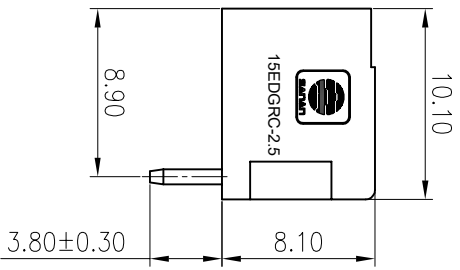


PCB LAYOUT

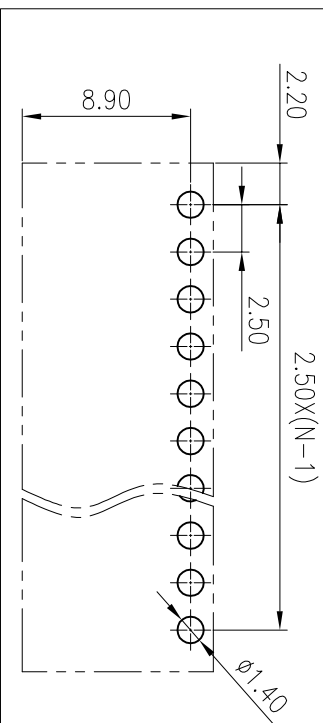

8P and 8P following no reinforcement.

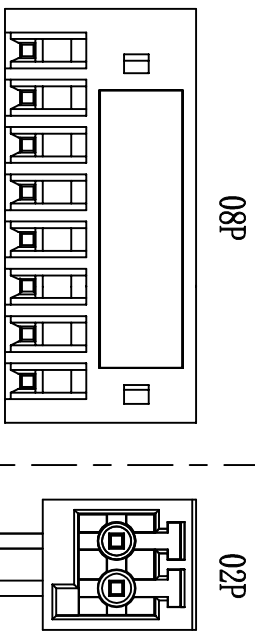

0	>3	>6	>10	>18	>30	>50	>80	>120	>180	>250	>315	>400	>500
~	~	~	~	~	~	~	~	~	~	~	~	~	~
3	6	10	18	30	50	80	120	180	250	315	400	500	
±0.12	±0.18	±0.22	±0.26	±0.31	±0.37	±0.57	±0.80	±0.93	±1.05	±1.15	±1.60	±2.20	±2.50

ITEM	NAME OF PART	MATERIAL	NOTES
2	Pin	Copper alloy	Sn Plated
1	Housing	PA66	UL94V-0

UL 标准/UL Standard:	B	C	D
额定电压/电流/Rated Voltage(V)/Current(A)	150/4	/	/
IEC 标准/IEC Standard:	/	/	/
过压类别/Overvoltage Category/污染等级/Pollution Degree	III/3	III/2	II/2
额定电压/电流/Rated Voltage(V)/Current(A)	/	/	250/5
额定脉冲电压(KV)/Rate Impulse Voltage(KV)	/	/	2.5
间距/Pitch(mm)/线数范围/Poles	2.50	N=02~12P	
使用温度范围/Operating temperature(°C)	-40~+105		
符合RoHS环保要求/Conform to RoHS	Yes		

MATERIAL: SURFACE:

MAT NO.:

STATUS:

APPD:

CHKD:

DRT:

SIZE: A4

TYPE:

SCALE:

SHEET: 1/1

NAME: 15ESARC-2.5-XXP-1Y-00A(H)

DRAWING NO.:

REV:

SHEET: 1/1

宁波三安电子科技有限公司
Sanan Electrical Technology Co. Ltd