


Type: Plug-in terminal-plug

Product name: GPD2.5-2-GY

Description: 5.2mm , 500V , 22A CE,UL

Product Picture

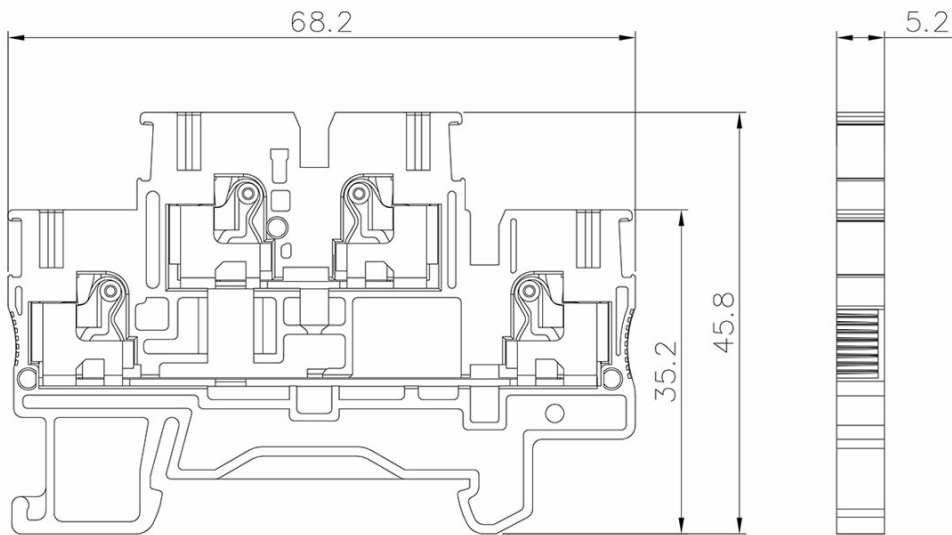

Basic Information

Product name	GPD2.5-2-GY
Width	5.2mm
Number of levels	2
Number of connections	4
Connection method	Plug-in terminal-plug
Protection Level	IP20

Work temperature	-40~+105°C
------------------	------------

IEC/IEC Data

Rated Current	22A
---------------	-----

Rated Voltage	500V
---------------	------

Overvoltage category	III
----------------------	-----

Pollution degree	3
------------------	---

Rated impulse voltage	6KV
-----------------------	-----

Conductor cross section solid	0.2-4mm ²
-------------------------------	----------------------

Conductor cross section flexible	0.2-2.5mm ²
----------------------------------	------------------------

Conductor cross section flexible,with ferrule	0.2-2.5mm ²
---	------------------------

Stripping length	8-10mm
------------------	--------

UL/UL Data

Use group	B	C	D
-----------	---	---	---

Rated Current	20A	20A	-
---------------	-----	-----	---

Rated Voltage	600V	600V	
---------------	------	------	--

Rated cross section	26-12AWG		
---------------------	----------	--	--

Material Data

Insulation material	PA66
---------------------	------

Insulation material group	I
---------------------------	---

Flame retardant grade, UL94 compliance	V0
--	----

Contact material

Copper alloy

导体表面镀层

Surface characteristics

Sn,Plated
